

# Stones at Large

## Porcelain Stone®


### Available Colors



**SAL02** ▶ Oro Bianco



**SAL03** ▶ Bianco Di Lucca

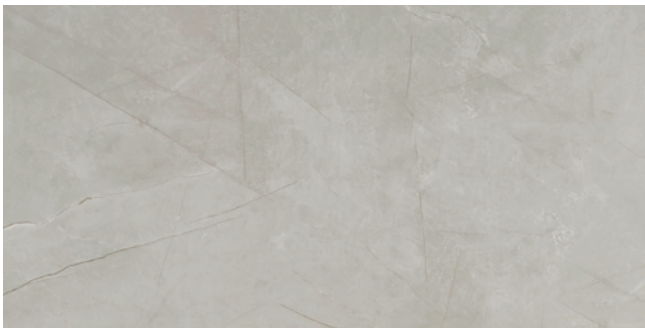


**SAL04** ▶ Mare D'Autunno

### Features and Benefits

- Stones at Large creatively reproduces the elegance of natural stone in sizes up to 48x48
- All colors available in polished and unpolished finishes
- Makes an exquisite surface for floors and walls in residential and commercial applications alike
- Coordinating trim and mosaics for fully-finished style
- Rectified field tile with recommended 3mm grout joint
- Globally sourced

### Available Mosaics




**SAL02.10202MOS** ▶  
Oro Bianco 2 x 2 Mosaic



**SAL03.10202MOS** ▶  
Bianco Di Lucca 2 x 2 Mosaic



**SAL04.10202MOS** ▶  
Mare D'Autunno 2 x 2 Mosaic

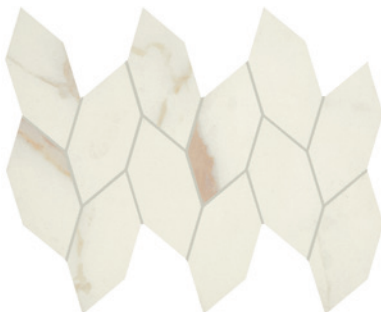

**SAL02.1LEAFMOS** ▶  
Oro Bianco Leaf Mosaic



**SAL03.1LEAFMOS** ▶  
Bianco Di Lucca Leaf Mosaic






**SAL04.1LEAFMOS** ▶  
Mare D'Autunno Leaf Mosaic

# Stones at Large

## Porcelain Stone®

### Sizes (Available in all colors)

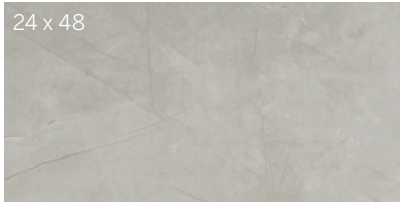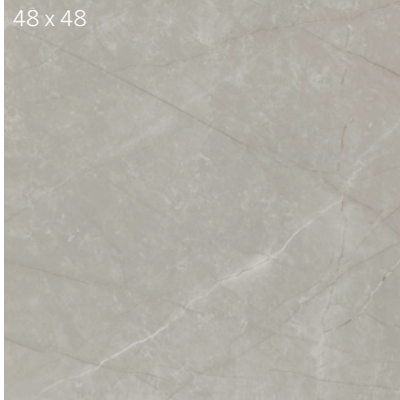

2 x 2 Mosaic  
(Mounted on a  
298 x 298 mm sheet)

Leaf Mosaic†  
(Mounted on a  
380 x 310 mm  
sheet)

### Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.



### Sizes & Finishes

#### Field Tile - Rectified

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 12	97 x 300	8.5	3	PO
12 x 24	300 x 613	8.5	3	UP/PO
24 x 48	598.5 x 1198.5	10.0	3	UP/PO
48 x 48	1195 x 1195	10.0	3	UP/PO

\*UP finish only available in 48x48 for SAL02 and SAL03.

**Note:** Field tiles are not modular. Bullnose and 4x12 are cut from 12x24 and are only modular with the 12x24 format.

#### Mosaics

Available in all colors

Nominal (in)	Sheet Size (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic*	298 x 298	8.5	3	UP
Leaf Mosaic†	380 x 310	8.5	2	UP

\* Mounted on 298mm x 298mm sheet with 3mm grout joints (Coverage area 0.9752 sf)

† Mounted on 380mm x 310mm sheet with 2mm grout joints (Coverage area 0.8718 sf)

#### Coordinating Trim

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 24 Single Bullnose	97 x 613	8.5	3	UP/PO



### Product Performance

Water Absorption	<0.50%	ISO 10545-3
Breaking Strength	≥ 35 N/mm <sup>2</sup>	ISO 10545-4
Facial Dimension	± 0.8 mm	ISO 13006
Warpage - Diagonal	± 1.8 mm	ISO 13006
Wedging	± 0.8 mm	ISO 13006
Frost Resistance	Resistant	ISO 10545-12

### Wet Dynamic Coefficient of Friction Range

UP	0.42 - 0.52	ANSI A326.3
PO	<0.42	ANSI A326.3

### Shade & Texture Index

SAL02 and SAL03 has a shade variation of V2 and SAL04 has a shade variation is V3.

V1	V2	V3	V4	V1 Uniform appearance
				<b>V2 Slight Variation</b>
				V3 Moderate Variation
				V4 Substantial Variation

This porcelain tile product is produced with a V2 variation. Expect that the amount of color and texture on each piece may vary slightly. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.

### Application Areas

Finish	Interior Floors (dry)	Interior Walls (wet/dry)	Exterior Walls	Interior Floors (Standing water/shower floors)	Exterior/Paving	Pool/Fountain Full Lining**	Water Line Pool/Fountains
PO†	✓	✓	✓				✓
UP	✓	✓	✓	Mosaics Only*		✓	✓

NOTE: Trim applications will differ from field tile applications for the same series.

\* 4" or less in both length and width, UPS or UP mosaics

\*\* Excludes mesh mounted mosaics. Crossville recommends face mounted or edge mounted mosaics for fully submerged applications. Contact your Crossville sales representative for more information.

† Polished finish is only recommended for residential and light commercial use due to low Mohs hardness scratch resistance and increased susceptibility to scratching compared to matte surface.

For more information on ANSI- A362.3 visit our website at <https://www.crossvilleinc.com/Resources/Tile-101/DCOF?tab=1>

# Stones at Large

## Crossville, Inc.

PO Box 1168  
Crossville, TN  
38557

**Phone** 931.484.2110  
**Fax** 931.456.2956  
**E-Mail** [Crosscc@CrossvilleInc.com](mailto:Crosscc@CrossvilleInc.com)  
**Web** [CrossvilleInc.com](http://CrossvilleInc.com)

### Recommended Use

Stones at Large UP is recommended for interior floors, interior walls, countertops, exterior walls, pool waterlines and full linings<sup>†</sup> in both residential and commercial applications. Stones at Large UP is not recommended for exterior horizontal surfaces or exterior paving. Stones at Large PO is recommended for interior floors (dry) and walls (wet and dry) in both residential and light commercial applications. See [CrossvilleInc.com](http://CrossvilleInc.com) for detailed installation instructions. See General Installation Guidelines at [CrossvilleInc.com](http://CrossvilleInc.com) for additional installation recommendations for the 48x48.

<sup>†</sup>Excludes mesh mounted mosaics.

### Wet area use for Mosaics

Crossville<sup>®</sup> produces the Stones at Large mosaics with the unpolished finish. The ANSI A326.3 wet Dynamic COF of Stones at Large is  $\geq 0.42$ . Their small sizes ensure frequent grout joints which provides traction and drainage. Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Stones at Large to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

### Care and Maintenance

Regular cleaning is the best way to keep Stones at Large tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville<sup>®</sup> products is available at [CrossvilleInc.com](http://CrossvilleInc.com).

### Our Warranty

Crossville Inc. guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1- 2022 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at [CrossvilleInc.com](http://CrossvilleInc.com).

### Crossville<sup>®</sup> Sample Express

Visit the website to learn more:  
**[CrossvilleInc.com/Products/Stones-at-Large](http://CrossvilleInc.com/Products/Stones-at-Large)**

#### Loose Tile Samples

Sizes may vary depending on product series  
Max. of 4 large field tile per order

#### Standard Shipping

FedEX Ground

### National Accounts

For over 20 years we have been offering Porcelain tile to commercial customers at National Accounts pricing programs with special discounts. The National Accounts department provides materials forecasting, sales support and samples.

### CrossvilleInc.com

If you want a better idea of what Crossville tile would look like in a particular room setting, simply visit our website and click on Cross-Vision. This powerful software tool allows you to visualize different types of Crossville tile. In addition, you'll find comprehensive information about Crossville's entire portfolio of products. You can also learn about the latest styles and trends from industry experts, download detailed care and maintenance instructions for our various products, or browse electronic versions of Crossville's product brochures. So whether you need information about Crossville products or tile in general, please visit us at [CrossvilleInc.com](http://CrossvilleInc.com).

#### Trade Organizations



#### Environmentally Aware

